
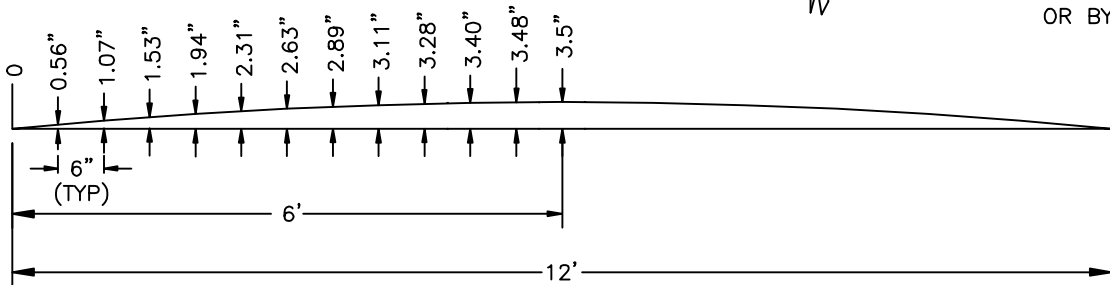


SECTION A-A

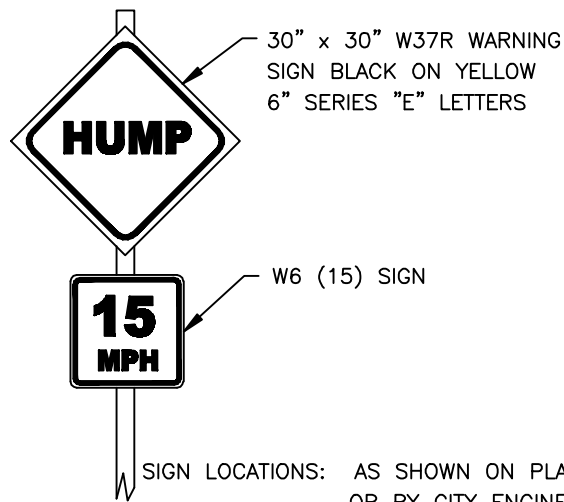

SECTION B-B

NOTES:

1. SPEED HUMPS SHALL NOT BE PLACED OVER MANHOLES, WATERGATES, JUNCTION CHAMBERS, OR OTHER FIXTURES IN THE ROADWAY.
2. EDGE OF SPEED HUMPS SHALL BE PLACED AT LEAST FIVE FEET (5') FROM EDGE OF DRIVEWAYS.
3. SPEED HUMPS SHALL BE PLACED AT PROPERTY LINES, OTHER LOCATIONS MUST BE APPROVED BY THE CITY ENGINEER.
4. SPEED HUMPS SHALL BE MADE OF 3/8" MIX, D2-AR-4000, 5.6% ASPHALT BINDER.

CITY OF CHINO HILLS

CHRIS VOGT
CITY ENGINEER

STANDARD 3.5"
SPEED HUMPS

T100